


Linear



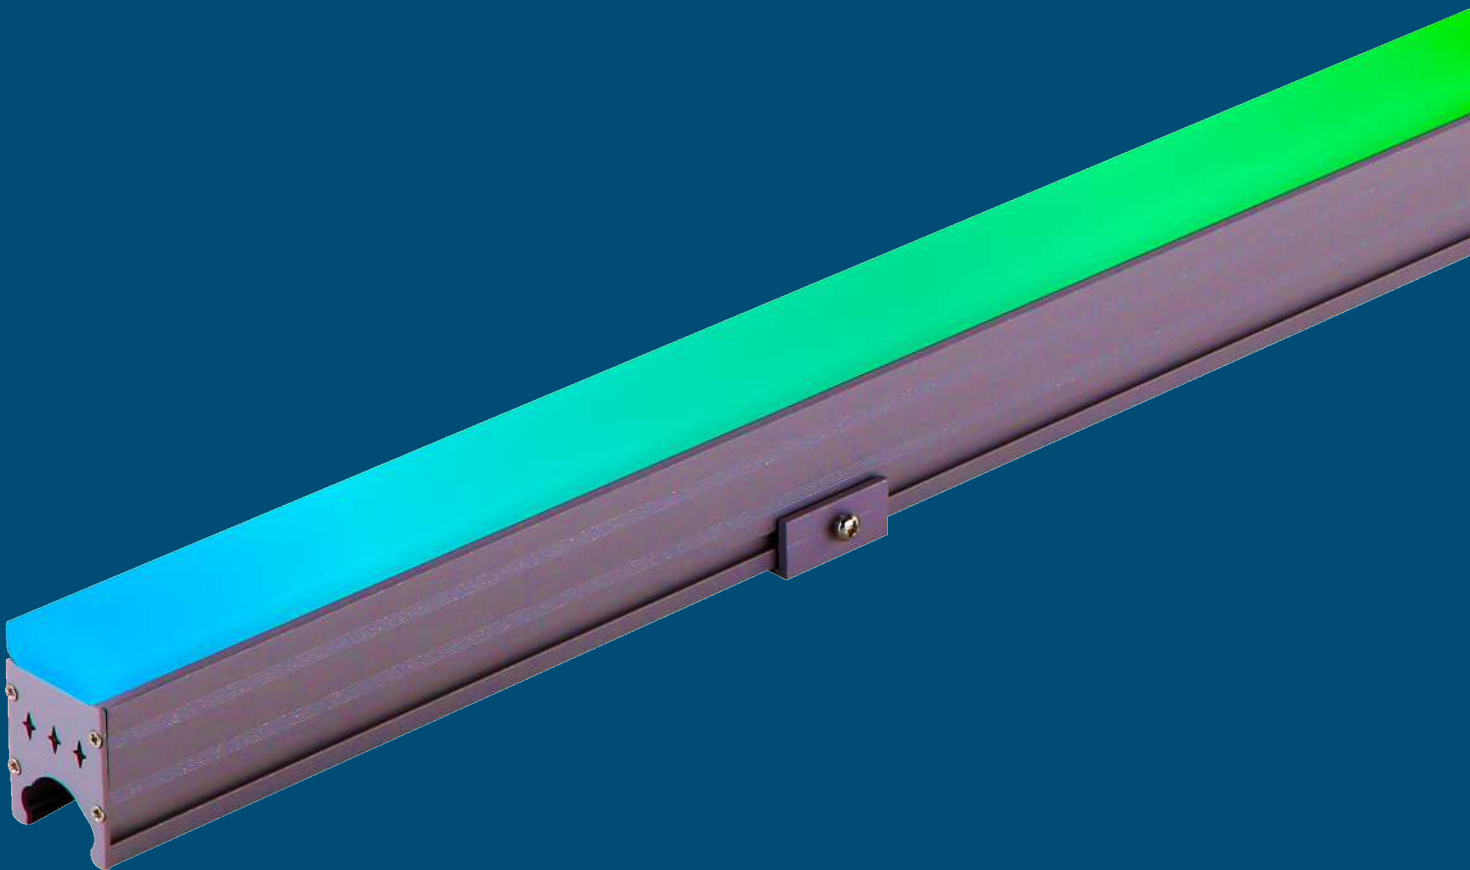

تنبيه
Attention
ممنوع مرور الشاحنات
أكثر من ٢.٥ طن والقطر
في مركز المدينة
No Heavy Vehicles
Above 2.5 Tons
in City Center
6:00 AM - 10:00 PM

KIPPOINTS
BY SHARAF

HD-L04060 | Linear Light




Technical data

Size	W32*H32mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted solid polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L04060	14W	DC24	270°	60	Single Color	On/Off
HD-L04072	16W	DC24	270°	72	Single Color	On/Off
HD-L04048R	10W	DC24	270°	48	RGB	DMX
HD-L04060R	13W	DC24	270°	60	RGB	DMX
HD-L04048RW	13W	DC24	270°	48	RGBW	DMX
HD-L04060RW	17W	DC24	270°	60	RGBW	DMX

HD-L03060 | Linear Light

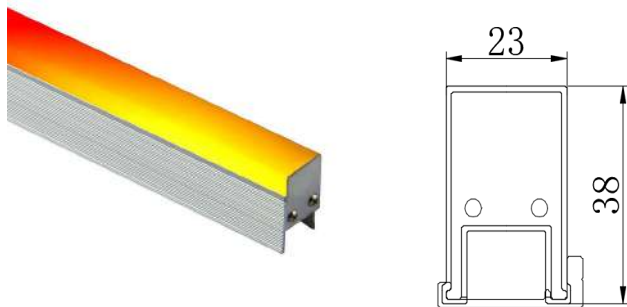


Technical data

Size	W23*H38 MM
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted solid polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L03060	14W	DC24	270°	60	Single Color	On/Off
HD-L03072	16W	DC24	270°	72	Single Color	On/Off
HD-L03048R	10W	DC24	270°	48	RGB	DMX
HD-L03060R	13W	DC24	270°	60	RGB	DMX
HD-L03048RW	13W	DC24	270°	48	RGBW	DMX
HD-L03060RW	17W	DC24	270°	60	RGBW	DMX

HD-L02060 | Linear Light




Technical data

Size	W50*H50mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted solid polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L02060	14W	DC24	270°	60	Single Color	On/Off
HD-L02072	16W	DC24	270°	72	Single Color	On/Off
HD-L02048R	10W	DC24	270°	48	RGB	DMX
HD-L02060R	13W	DC24	270°	60	RGB	DMX
HD-L02048RW	13W	DC24	270°	48	RGBW	DMX
HD-L02060RW	17W	DC24	270°	60	RGBW	DMX

HD-L12060 | Linear Light



Technical data

Size	W50*H65 MM
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted solid polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L12060	14W	DC24	270°	60	Single Color	On/Off
HD-L12072	16W	DC24	270°	72	Single Color	On/Off
HD-L12060R	10W	DC24	270°	48	RGB	DMX
HD-L12048R	13W	DC24	270°	60	RGB	DMX
HD-L12060RW	13W	DC24	270°	48	RGBW	DMX
HD-L12048RW	17W	DC24	270°	60	RGBW	DMX

HD-L23048 | Linear Light




Technical data

Size	W22*H32mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L23048	14W	DC24	60/120°	48	Single Color	On/Off
HD-L23060	14W	DC24	60/120°	60	Single Color	On/Off
HD-L23072	16W	DC24	60/120°	72	Single Color	On/Off
HD-L23048R	10W	DC24	60/120°	48	RGB	DMX
HD-L23048RW	13W	DC24	60/120°	48	RGBW	DMX

HD-L22048 | Linear Light



Technical data

Size	W23*H50mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant frosted polycarbonates (PC)
Connector:	Male / Female Waterproof Connector

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L22048	14W	DC24	60/120°	48	Single Color	On/Off
HD-L22060	14W	DC24	60/120°	60	Single Color	On/Off
HD-L22072	16W	DC24	60/120°	72	Single Color	On/Off
HD-L22048R	10W	DC24	60/120°	48	RGB	DMX
HD-L22048RW	13W	DC24	60/120°	48	RGBW	DMX

HD-L17060 | Linear Light



Technical data

Size	W32*H32mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant individual lens Crystal Pixel view
Connector:	Male / Female Waterproof Connector



Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L17060	10W	DC24	60/120°	60	Single Color	On/Off
HD-L17048R	10W	DC24	60/120°	48	RGB	DMX
HD-L17048RW	13W	DC24	60/120°	48	RGBW	DMX
HD-L17048R2	24W	DC24	60/120°	48	RGB	DMX

HD-L20060 | Linear Light



Technical data

Size	W18*H24mm
IP Rating	IP66
Material	High corrosion resistance die-cast copper-free aluminum body & UV-resistant frosted polycarbonates (PC)
Coating	Polyester powder coating with phosphocromating pre-finish
Pixel Pitch	6/15/30/40 Pixel
Screws	Stainless steel
Cover	UV-resistant crystal frosted polycarbonates (PC)
Connector:	Male / Female Waterproof Connector



Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-L20060	14W	DC24	60/120°	60	Single Color	On/Off
HD-L20072	16W	DC24	60/120°	72	Single Color	On/Off
HD-L20048R	10W	DC24	60/120°	48	RGB	DMX
HD-L20048RW	13W	DC24	60/120°	48	RGBW	DMX