


Wall Washer




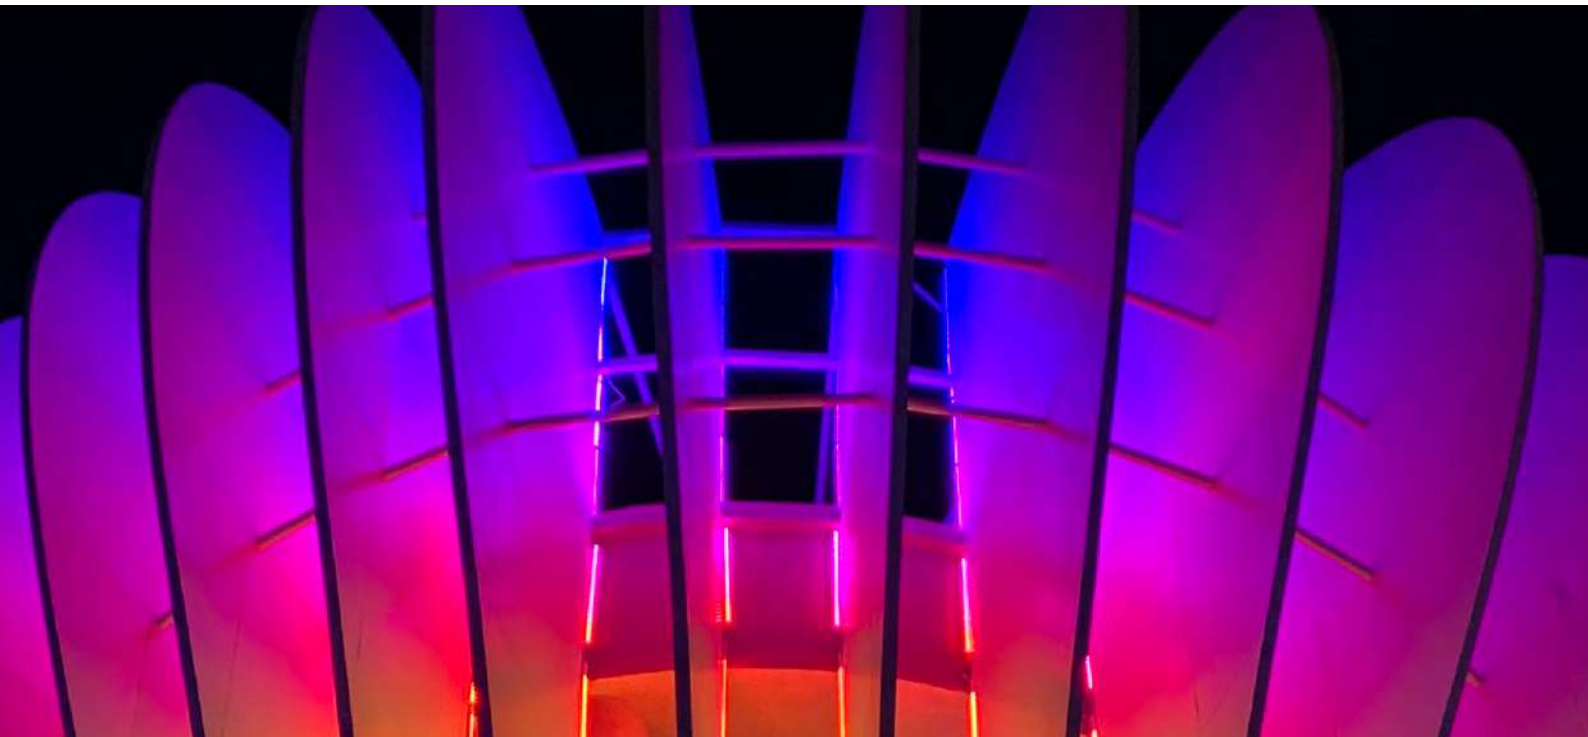

Technical data

Input Voltage	220V / 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W42*H30*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W01018WX	18*1W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	18	Single Color	On/Off
HD-W01024WX	24*1W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W01030WX	30*1W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	30	Single Color	On/Off
HD-W01036R3	36*1W(12R12G12B)	DC24	30°/60°/80°/15*45°	36	RGB	DMX
HD-W01018R3	18*2W(3in1)	DC24	30°/60°/80°/15*45°	18	RGB	DMX
HD-W01024R3	24*1.5W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W01018R4	18*2W(4in1)	DC24	130°/60°/80°/15*45°	18	RGBW	DMX
HD-W01024R4	24*2W(4in1)	DC24	130°/60°/80°/15*45°	24	RGBW	DMX

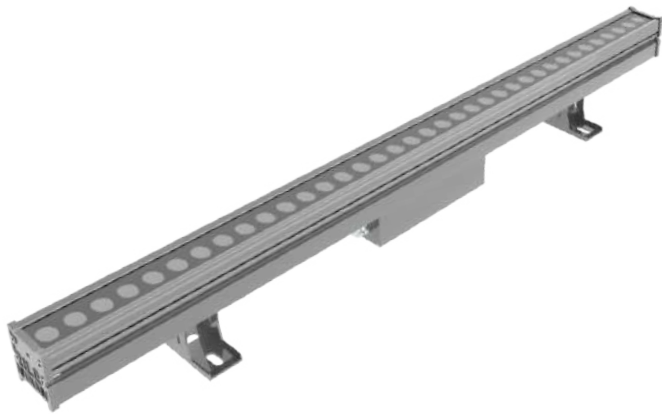
Technical data

Input Voltage	220V / 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W52*H52*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W02036WX	36*1W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	36	Single Color	On/Off
HD-W02024WX	24*2W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W02045WX	45W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	45	Single Color	On/Off
HD-W02060WX	60W	220V / DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	60	Single Color	On/Off
HD-W02036R3	36*2W(12R12G12B)	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	36	RGB	DMX
HD-W02024R3	24*3W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W02036R3	36*2.5W(3in1)	DC24	30°/60°/80°/15*45°	36	RGB	DMX
HD-W02024R4	24*4W(4in1)	DC24	30°/60°/80°/15*45°	24	RGBW	DMX
HD-W02036R4	36*2W(4in1)	DC24	30°/60°/80°/15*45°	36	RGBW	DMX
HD-W02024R3	24*2W(4in1)	220V / DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W02024R4	24*3W(4in1)	220V / DC24	30°/60°/80°/15*45°	24	RGBW	DMX
HD-W02036R3	36*2W(3in1)	220V / DC24	30°/60°/80°/15*45°	36	RGB	DMX
HD-W02036R4	36*2W(4in1)	220V / DC24	30°/60°/80°/15*45°	36	RGBW	DMX



Input Voltage	220V / 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W68*H70*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included


Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W03042WX	42*2W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	42	Single Color	On/Off
HD-W03036WX	36*3W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	36	Single Color	On/Off
HD-W03045WX	45W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	45	Single Color	On/Off
HD-W03060WX	60W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	60	Single Color	On/Off
HD-W03036R3	36*3W(12R12G12B)	DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	36	RGB	DMX
HD-W0324R3	24*2W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W03036R3	36*2W(3in1)	DC24	30°/60°/80°/15*45°	36	RGB	DMX
HD-W03024R4	24*4W(4in1)	DC24	30°/60°/80°/15*45°	24	RGBW	DMX
HD-W02036R4	36*3W(4in1)	DC24	30°/60°/80°/15*45°	36	RGBW	DMX



Technical data

Input Voltage	220V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W95*H95*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W04048WX	48*2W	220V	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	48	Single Color	On/Off
HD-W04054WX	54*2W	220V	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	54	Single Color	On/Off
HD-W04072WX	72*2W	220V	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	72	Single Color	On/Off
HD-W04048R3	48*2W(3in1)	220V	30°/60°/80°/15*45°	48	RGB	DMX
HD-W04072R3	72*2W(3in1)	220V	30°/60°/80°/15*45°	72	RGB	DMX
HD-W04048R4	48*3wW(4in1)	220V	30°/60°/80°/15*45°	48	RGBW	DMX
HD-W04072R4	72*3W(4in1)	220V	30°/60°/80°/15*45°	72	RGBW	DMX

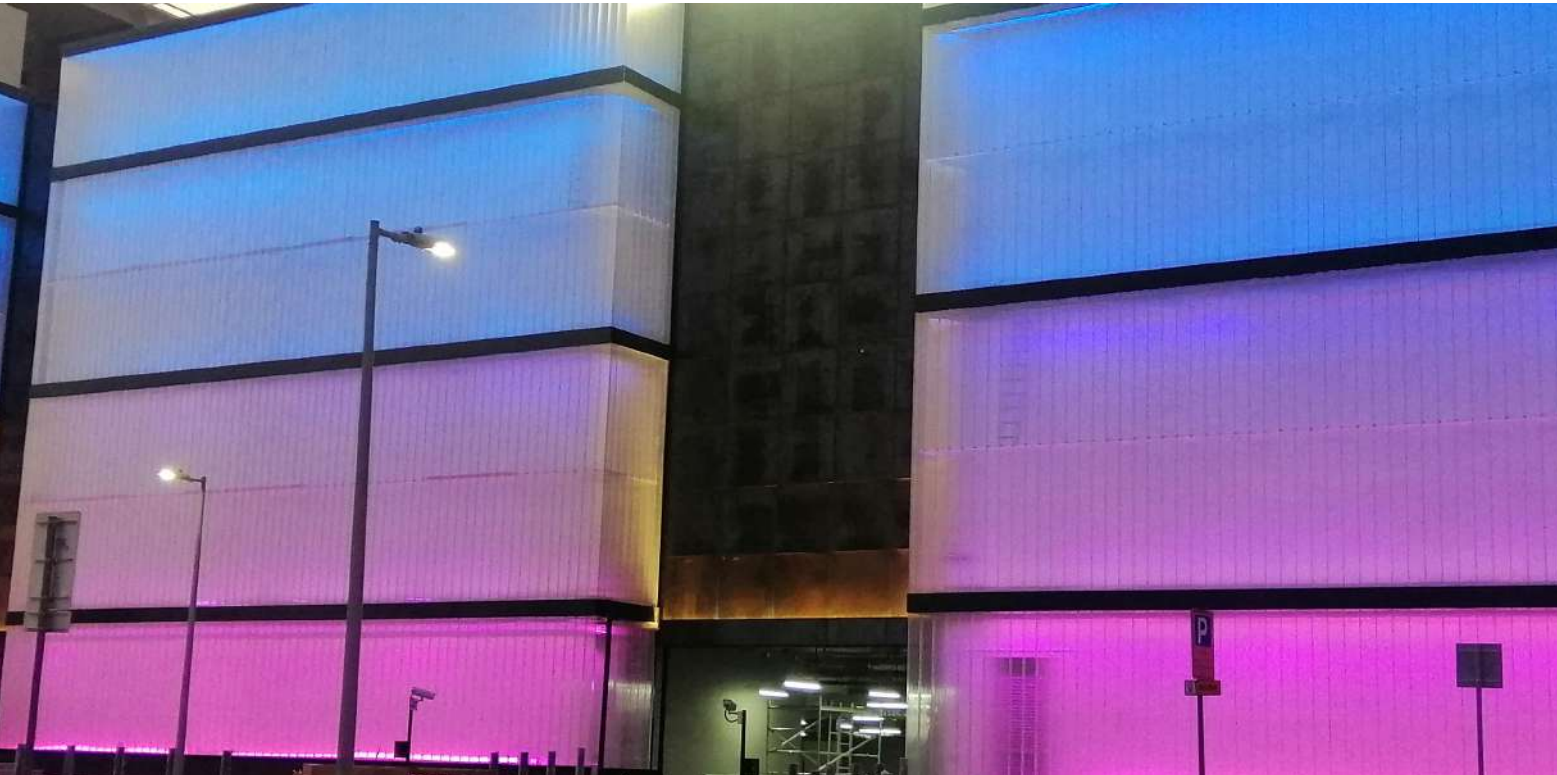

Technical data



Input Voltage	24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W40*H60*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W06018WX	18*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	18	Single Color	On/Off
HD-W06024WX	24*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W06036WX	36*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	36	Single Color	On/Off
HD-W06018R3	18*2W(3in1)	DC24	30°/60°/80°/15*45°	18	RGB	DMX
HD-W06024R3	24*1.5W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W06018R4	18*2W(4in1)	DC24	130°/60°/80°/15*45°	18	RGBW	DMX
HD-W06024R4	24*2W(4in1)	DC24	130°/60°/80°/15*45°	24	RGBW	DMX



Technical data



Input Voltage	220V / DC 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W40*H28*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W07018WX	18*1W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	18	Single Color	On/Off
HD-W07024WX	24*1W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W07036WX	36*1W	220V / DC24	10°/15*45°/90° / 10*30°/20*45°/15*65°/15*45°	36	Single Color	On/Off
HD-W07018R3	18*2W(3in1)	DC24	30°/60°/80°/15*45°	18	RGB	DMX
HD-W07024R3	24*1.5W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W07018R4	18*2W(4in1)	DC24	130°/60°/80°/15*45°	18	RGBW	DMX
HD-W07024R4	24*2W(4in1)	DC24	130°/60°/80°/15*45°	24	RGBW	DMX

HD-W08036WX | Wall Washer



Technical data

Input Voltage	DC 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W34*H65*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W08036WX	24*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W08036WX	36*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	36	Single Color	On/Off
HD-W08024R3	24*2W(3in1)	DC24	30°/60°/80°/15*45°	24	RGB	DMX
HD-W08024R4	24*2.W(4in1)	DC24	130°/60°/80°/15*45°	24	RGBW	DMX

HD-W09018WX | Wall Washer



Technical data

Input Voltage	220V / DC 24V
Beam Angle	10° to 80°
Color	RGB / RGBW/ Single Color
Control Type	DMX512 / Switch/ Dali
Size	W40*H28*L1000mm
IP Rating	IP65
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	LED
Screws	Stainless steel
Gasket	Silicone rubber
Cover	Tempered glass
Cable Gland	Double nickel-plated brass cable gland PG11
Power Cable	1m power cable included

Model	Wattage	Voltage	Beam Angle	Chip Qty	Color	Control
HD-W09018WX	18*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	18	Single Color	On/Off
HD-W09024WX	24*1W	DC24	10°/15*45°/90°/ 10*30°/20*45°/15*65°/15*45°	24	Single Color	On/Off
HD-W09036R3	18*2W(3in1)	DC24	30°/60°/80°/15*45°	18	RGB	DMX
HD-W09045R4	18*2.W(4in1)	DC24	130°/60°/80°/15*45°	18	RGBW	DMX